

SCHATTTELLO



This is the classic and proven gastronomy parasol made by MAY. Thousands of customers appreciate its stability, durability and variety. Multiple sizes allow various combinations for an optimal shading of your terrace. You would like to please your guests on a hot summer's day by offering them a welcoming seat outdoors in the cool shade? Or to charm them on a nippy day or a chilly night by conjuring up a cosy atmosphere with dimmed lights and comfortable heating? Then our strong but graceful SCHATTELLO is what you are looking for. The maintenance-free gearbox is designed for ultra-easy handling, even after many years of outdoor use in any weather.



SOLID

LARGE PARASOL

- For professional gastronomy
- All-weather protection
- Easy operation
- Professional additional equipment



SCHATTELLO 4.0 x 4.0 m
MayTex-Acryl SA 314 038 beige



SCHATTELLO 5.0 x 5.0 m
MayTex-Acryl SA 314 347 ruby

You will find our product video at: may.ag/s_en

Frame joints

For us perfection in workmanship is an absolute must. Therefore, all moving axes are fitted with easily removable bolts. This extravagant technology ensures maximum stability and durability as well as easy execution of repairs.



Top plate

Elegant and graceful. Can be screwed off. Colour to match frame.

Canopy options

This optional, decorative textile bonnet for the top of the parasol canopy gives a feeling of airy, Mediterranean stylishness.



Canopy bonnet



Central rod system

The robust parasol central rod system consists of two discs with support struts and spokes. In order to prevent the spokes from twisting, the lower distribution flange is firmly welded to the support pole. The frame is made of high-quality, alloyed, extruded aluminium profiles.

- support pole \varnothing 76 x 3 mm
- spoke dimensions 35 x 20 x 2 mm
- support strut dimensions 30 x 20 x 2 mm

Valance options



Straight valance

Without valance



Operating the parasol

SCHATTELLO, our giant parasol, is opened and closed with a smooth-running, removable stainless steel crank or with the help of a cordless drill (hex drill fitting). The reliable drive-system with accurate integrated bevel gears guarantees effortless handling, even after years of usage. For a more convenient operation the giant parasol can be equipped with a tabular motor at extra charge.



Canopy covering

Due to a special self-tensioning telescopic spring system the colour remains perfectly taut, even after years of usage. The canopy covering can easily and quickly be exchanged by means of a practical hooking system. For fabrics and colours see page 194 onwards.



Wind tunnel tested

We were able to prove the stability and sturdiness of our parasols during various tests in a wind tunnel. Even wind speeds of 50 km/h could not do any harm to a parasol of \varnothing 5 m. However, stability can only be guaranteed if the pedestal frame is adequately weighed down for the wind conditions of the intended location.

High-quality framework materials

Frame surface is powder-coated, highly shock and impact-proof, available in following colours:



Standard colours:

- RAL 9010 pure white
- RAL 9006 white aluminium

Special colours, no extra charge:

- RAL 8019 greybrown
- RAL 7016 anthracite grey fine structure

Special colours available on request.

Installation options

Mobile see page 106 onwards,
stationary see page 110 onwards.

When not in use

The protective cover provided can easily be slipped over the parasol during bad weather periods.

Mounting

Pull parasol from cardboard sleeve, remove all packaging material, place parasol mast in installation base, that's all – ready for use in a jiffy!

Additional equipment

Side sheets see page 192 onwards, rain gutter see page 88 onwards, premium equipment see page 178 onwards.



SCHATTELLO Ø 4.0 m
MayTex-Poly M 9878 terracotta
without valance



SCHATTELLO Ø 6.0 m
MayTex-Poly M 9879 wine red
without valance




straight valance

180 cm


212 cm



straight valance

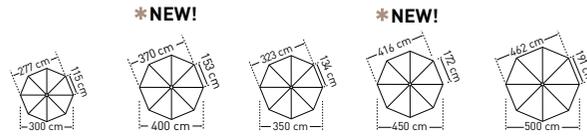

SCHATTELLO round	Ø 3.0 m	Ø 3.5 m	Ø 4.0 m	Ø 4.5 m	Ø 5.0 m
Segments	8	8	8	8	8
Area	m ² 6.4	8.7	11.3	14.3	17.7
A Height closed incl. top plate	cm 355	366	410	427	425
B Height opened incl. top plate	cm 304	302	303	317	318
C Headroom with valance	cm 212	212	202	212	202
D Headroom without valance from spoke edge	cm 237	237	227	237	227
F Ground clearance from spoke edge	cm 193	182	193	187	158
G Height of lower disc flange	cm 227	225	183	203	198
Weight without packaging MayTex-Acryl without valance	kg 26	28	33	34	38
Support pole diameter	mm outer-Ø 76, pole thickness 3				
Packaging cardboard sleeve: length 444 cm	Ø 33 cm approx. 17 kg				
Installation base length/width/min. depth	cm 50/50/60				
Minimum-ballast Number of layers of concrete slabs XZ50 required	1 x = approx. 112 kg				

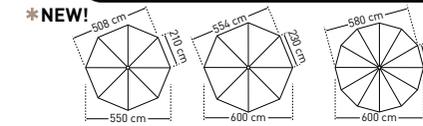


SCHATTELLO round	Ø 5.5 m	Ø 6.0 m	Ø 6.0 m
Segments	8	8	12
Area	m ² 21.4	25.5	27
A Height closed incl. top plate	cm 435	440	450
B Height opened incl. top plate	cm 319	333	343
C Headroom with valance	cm 212	197	212
D Headroom without valance from spoke edge	cm 237	222	237
F Ground clearance from spoke edge	cm 145	123	132
G Height of lower disc flange	cm 204	213	223
Weight without packaging MayTex-Acryl without valance	kg 39	46	57
Support pole diameter	mm outer-Ø 76, pole thickness 3		
Packaging cardboard sleeve: length 444 cm	Ø 33 cm approx. 17 kg	Ø 35 cm approx. 18 kg	
Installation base length/width/min. depth	cm 50/50/60	60/60/60	
Minimum-ballast Number of layers of concrete slabs XZ50 required	1 x = approx. 112 kg	2 x = approx. 224 kg	


The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (SZ118, SZ146, SZ150). The increase in height for parasols with other installation bases can be seen in the list below:


- Full frame pedestal: SZ201 + 14 cm
- Full frame pedestal: SZ203 + 17 cm
- Full frame pedestal: SZ205 + 21 cm
- Full frame pedestal: SZ411 + 9 cm
- Full frame pedestal: SZ412 + 12 cm
- Full frame pedestal: SZ414 + 16 cm
- Full frame pedestal: SZ420 + 19 cm
- Anchor plate: SZ131 + 1.5 cm
- Anchor plate: SZ261 + 1.5 cm
- Base plate: SZ272 + 4 cm
- Base plate: SZ273 + 4 cm
- Base plate: SZ274 + 4 cm
- Base plate: SZ275 + 4 cm

3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

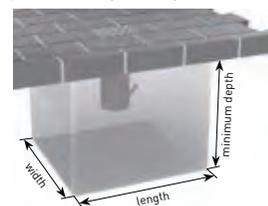


Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

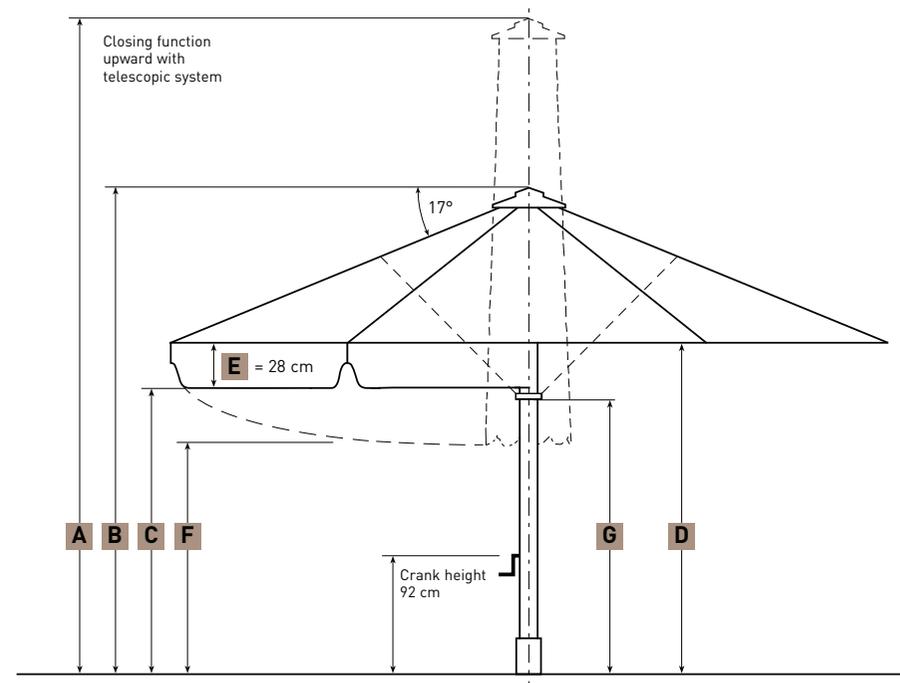



SCHATTELLO triangular		4 x 4 x 4 m	6 x 6 x 6 m
Segments		6	6
Area		m ² 6.9	15.6
A	Height closed incl. top plate	cm 391	402
B	Height opened incl. top plate	cm 284	295
C	Headroom with valance	cm 212	212
D	Headroom without valance from spoke edge	cm 237	237
F	Ground clearance from spoke edge	cm 153	51
G	Height of lower disc flange	cm 234	183
Weight without packaging MayTex-Acryl without valance		kg 27	40
Support pole diameter		mm outer-Ø 76, pole thickness 3	
Packaging cardboard sleeve: length 444 cm		Ø 33 cm approx. 17 kg	
Installation base length/width/min. depth		cm 50/50/60	
Minimum-ballast Number of layers of concrete slabs XZ50 required		1 x = approx. 112 kg	

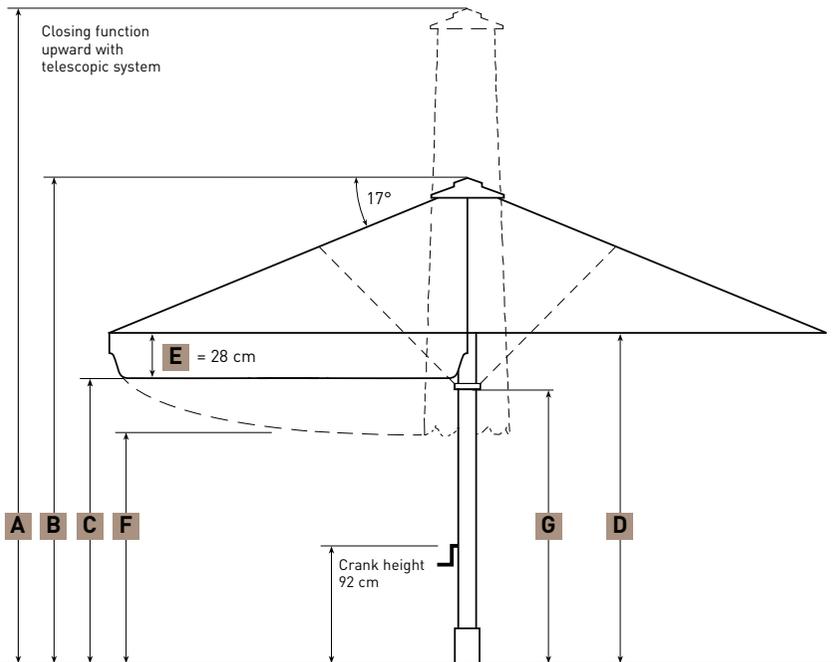



SCHATTELLO 3.5 x 3.5 m
MayTex-Acryl SA 314 010 white
without valance



SCHATTELLO 4.5 x 4.5 m
MayTex-Acryl DA 8203 grey basalt
without valance



straight valance




straight valance



continuous valance



continuous valance

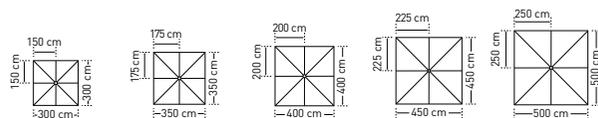


SCHATTELLO square	3.0 x 3.0 m	3.5 x 3.5 m	4.0 x 4.0 m	4.5 x 4.5 m	5.0 x 5.0 m
Segments	8	8	8	8	8
Area	m ² 9	12.3	16	20.3	25
A Height closed incl. top plate	cm 410	418	425	433	440
B Height opened incl. top plate	cm 300	308	315	323	330
C Headroom with valance	cm 212	212	212	212	212
D Headroom without valance from spoke edge	cm 237	237	237	237	237
F Ground clearance from spoke edge	cm 180	154	119	96	62
G Height of lower disc flange	cm 252	190	198	203	213
Weight without packaging MayTex-Acryl without valance	kg 31	35	39	41	43
Support pole diameter	outer-Ø 76, pole thickness 3				
Packaging cardboard sleeve: length 444 cm	Ø 33 cm approx. 17 kg				
Installation base length/width/min. depth	cm 50 / 50 / 60				60 / 60 / 60
Minimum-ballast Number of layers of concrete slabs XZ50 required	1 x = approx. 112 kg				2 x = approx. 224 kg


The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (SZ118, SZ146, SZ150). The increase in height for parasols with other installation bases can be seen in the list below:

- Full frame pedestal: SZ201 + 14 cm
- Full frame pedestal: SZ203 + 17 cm
- Full frame pedestal: SZ205 + 21 cm
- Full frame pedestal: SZ411 + 9 cm
- Full frame pedestal: SZ412 + 12 cm
- Full frame pedestal: SZ414 + 16 cm
- Full frame pedestal: SZ420 + 19 cm
- Anchor plate: SZ131 + 1.5 cm
- Anchor plate: SZ261 + 1.5 cm
- Base plate: SZ272 + 4 cm
- Base plate: SZ273 + 4 cm
- Base plate: SZ274 + 4 cm
- Base plate: SZ275 + 4 cm

3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

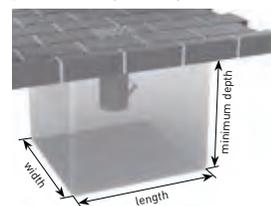

Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

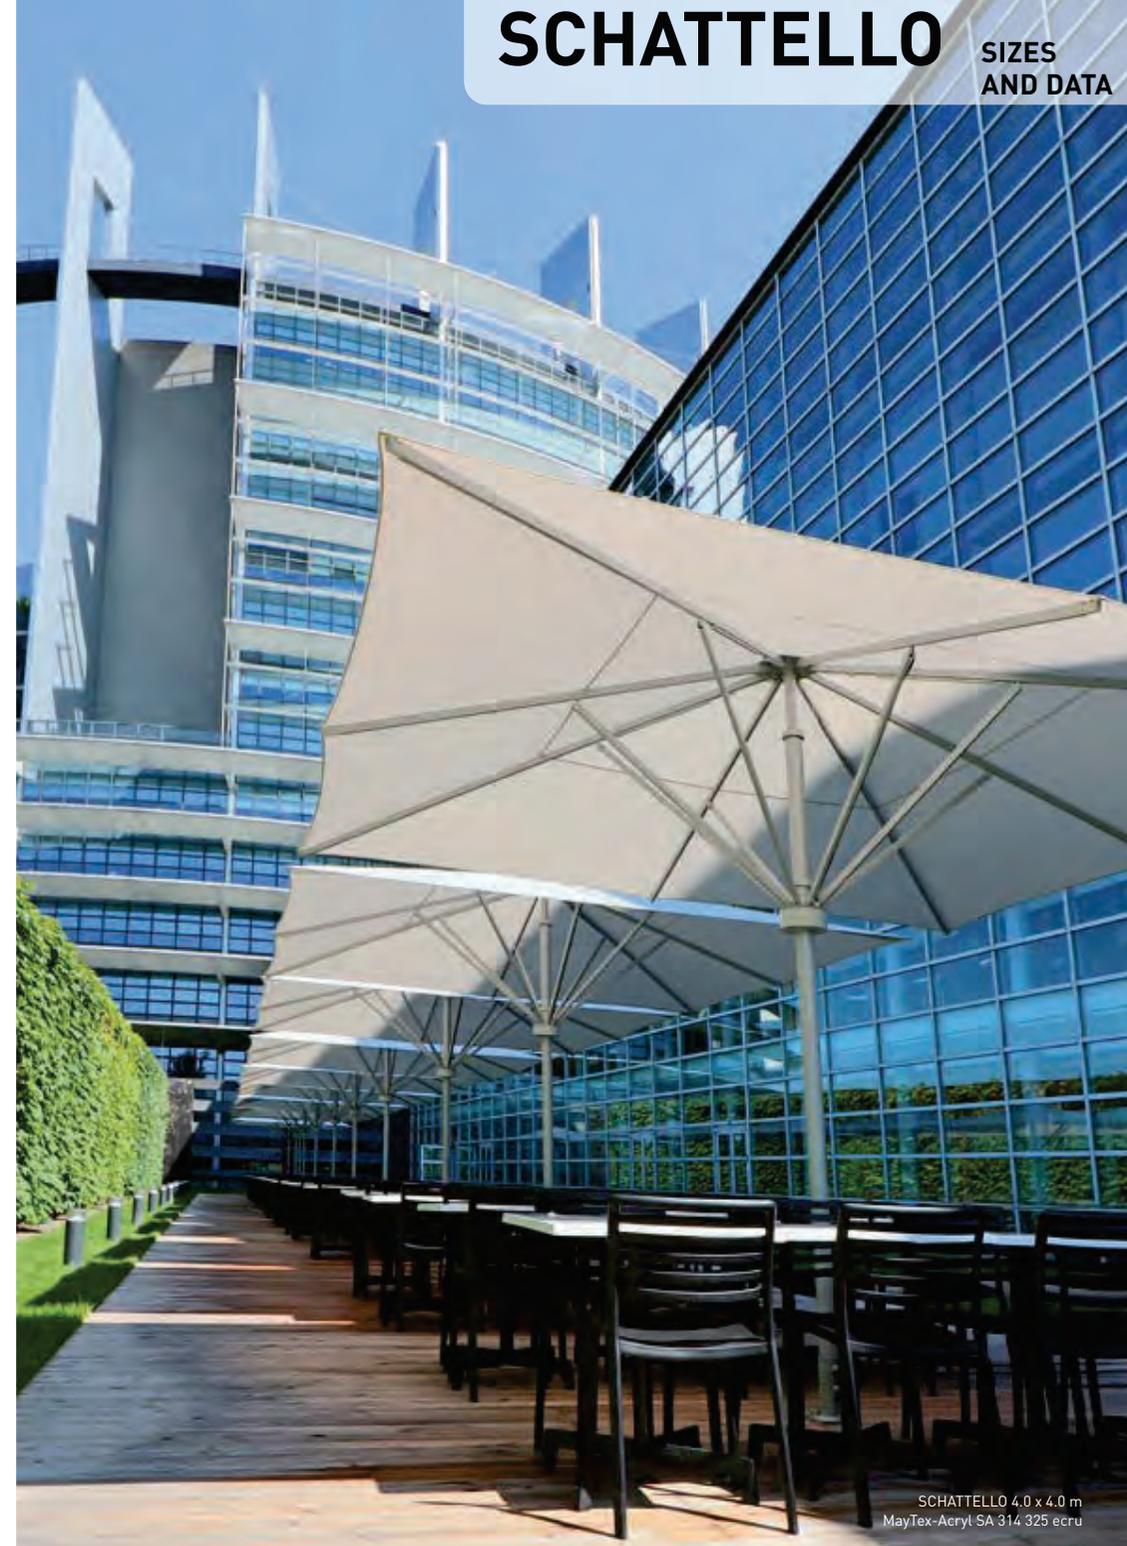

SCHATTELLO 4.0 x 4.0 m
MayTex-Acryl SA 314 325 ecrü



SCHATTELLO 4.0 x 5.0 m
MayTex-Acryl SA 314 143 mallow
without valance



straight valance



continuous valance




SCHATTELLO 4.0 x 6.0 m
MayTex-Acryl SA 314 851 vanilla
without valance




straight valance



continuous valance



SCHATTELLO rectangular	2.0 x 3.0 m	2.0 x 4.0 m	2.5 x 3.0 m	2.5 x 3.5 m	2.5 x 4.0 m
Segments	6	6	8	8	8
Area	6 m ²	8	7.5	8.8	10
A Height closed incl. top plate	383	387	399	397	393
B Height opened incl. top plate	277	280	301	298	294
C Headroom with valance	212	212	212	212	212
D Headroom without valance from spoke edge	237	237	237	237	237
F Ground clearance from spoke edge	202	152	193	175	150
G Height of lower disc flange	232	237	246	243	240
Weight without packaging MayTex-Acryl without valance	27	26	27	29.5	30.5
Support pole diameter	outer-Ø 76, pole thickness 3				
Packaging cardboard sleeve: length 444 cm	Ø 33 cm approx. 17 kg				
Installation base length/width/min. depth	50/50/60				
Minimum-ballast Number of layers of concrete slabs XZ50 required	1 x = approx. 112 kg				




	2.5 x 5.0 m	3.0 x 3.5 m	3.0 x 4.0 m	3.0 x 4.5 m	3.0 x 5.0 m	3.0 x 6.0 m	3.5 x 4.0 m	3.5 x 4.5 m
	6	8	8	8	8	8	8	8
	12.5	10.5	12	13.5	15	18	14	15.8
A	397	402	397	405	397	405	410	415
B	298	305	298	298	290	298	303	308
C	212	212	212	212	212	212	212	212
D	237	237	237	237	237	237	237	237
F	107	160	135	124	97	63	135	117
G	243	250	245	203	245	190	187	230
	31	30.5	31	32	35	43	35	40
	outer-Ø 76, pole thickness 3							
	Ø 33 cm approx. 17 kg							
	50/50/60							
	1 x = approx. 112 kg							


The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (SZ118, SZ146, SZ150). The increase in height for parasols with other installation bases can be seen in the list below:


- Full frame pedestal: SZ201 + 14 cm
- Full frame pedestal: SZ203 + 17 cm
- Full frame pedestal: SZ205 + 21 cm
- Full frame pedestal: SZ411 + 9 cm
- Full frame pedestal: SZ412 + 12 cm
- Full frame pedestal: SZ414 + 16 cm
- Full frame pedestal: SZ420 + 19 cm
- Anchor plate: SZ131 + 1.5 cm
- Anchor plate: SZ261 + 1.5 cm
- Base plate: SZ272 + 4 cm
- Base plate: SZ273 + 4 cm
- Base plate: SZ274 + 4 cm
- Base plate: SZ275 + 4 cm

3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.

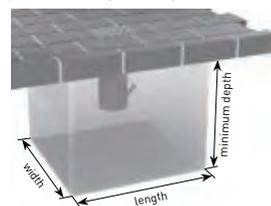

Intermediate and special sizes on request.
Dimensional tolerance approx. 5%.

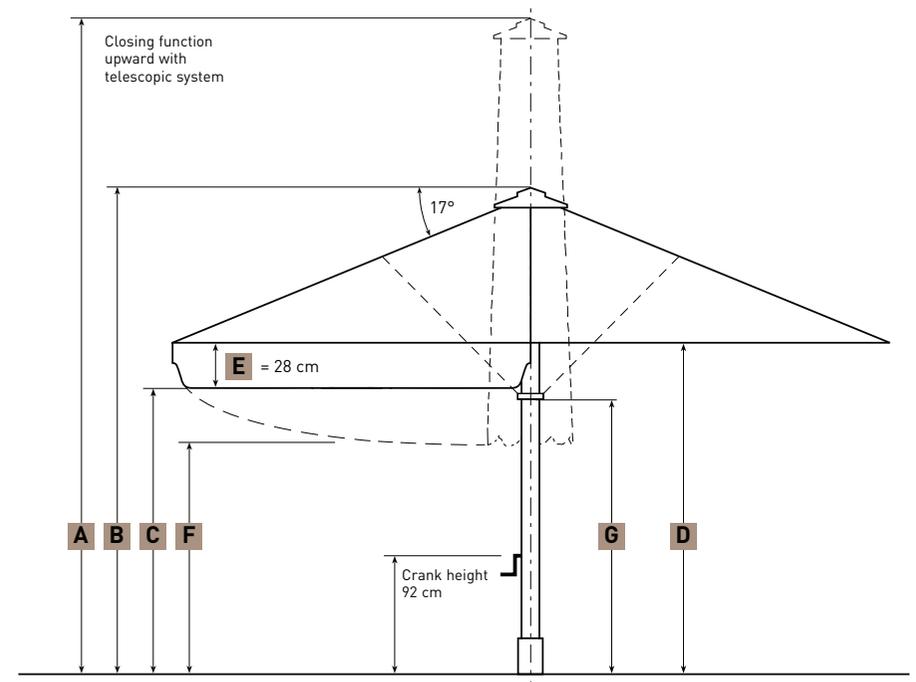

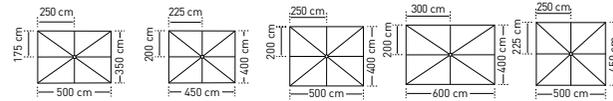


SCHATTELLO rectangular	3.5 x 5.0 m	4.0 x 4.5 m	4.0 x 5.0 m	4.0 x 6.0 m	4.5 x 5.0 m
Segments	8	8	8	8	8
Area	m ² 17.5	18	20	24	22.5
A Height closed incl. top plate	cm 420	416	420	425	425
B Height opened incl. top plate	cm 313	293	313	318	313
C Headroom with valance	cm 212	212	212	212	212
D Headroom without valance from spoke edge	cm 237	237	237	237	237
F Ground clearance from spoke edge	cm 105	105	84	54	84
G Height of lower disc flange	cm 230	225	198	203	235
Weight without packaging MayTex-Acryl without valance	kg 41	41	43	46	44
Support pole diameter	mm outer-Ø 76, pole thickness 3				
Packaging cardboard sleeve: length 444 cm	mm Ø 33 cm approx. 17 kg				
Installation base length/width/min. depth	cm 50 / 50 / 60		60 / 60 / 60		
Minimum-ballast Number of layers of concrete slabs XZ50 required	1x = approx. 112 kg		2x = approx. 224 kg		


The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube (SZ118, SZ146, SZ150). The increase in height for parasols with other installation bases can be seen in the list below:

- Full frame pedestal: SZ201 + 14 cm
- Full frame pedestal: SZ203 + 17 cm
- Full frame pedestal: SZ205 + 21 cm
- Full frame pedestal: SZ411 + 9 cm
- Full frame pedestal: SZ412 + 12 cm
- Full frame pedestal: SZ414 + 16 cm
- Full frame pedestal: SZ420 + 19 cm
- Anchor plate: SZ131 + 1.5 cm
- Anchor plate: SZ261 + 1.5 cm
- Base plate: SZ272 + 4 cm
- Base plate: SZ273 + 4 cm
- Base plate: SZ274 + 4 cm
- Base plate: SZ275 + 4 cm


3D view of installation base with top plate for winter protection. Base must be frost-proof and enlarged if the ground is unstable.


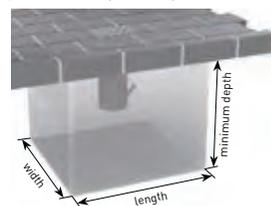


Intermediate and special sizes on request.
Dimensional tolerance approx. ± 5%



SCHATTELLO rectangular	4.5 x 5.5 m
Segments	8
Area	m ² 24.8
A Height closed incl. top plate	cm 423
B Height opened incl. top plate	cm 312
C Headroom with valance	cm 212
D Headroom without valance from spoke edge	cm 237
F Ground clearance from spoke edge	cm 64
G Height of lower disc flange	cm 235
Weight without packaging MayTex-Acryl without valance	kg 51
Support pole diameter	mm outer-Ø 76
Packaging cardboard sleeve: length 444 cm	mm Ø 33 cm approx. 17 kg
Installation base length/width/min. depth	cm 60 / 60 / 60
Minimum-ballast Number of layers of concrete slabs XZ50 required	2x = approx. 224 kg

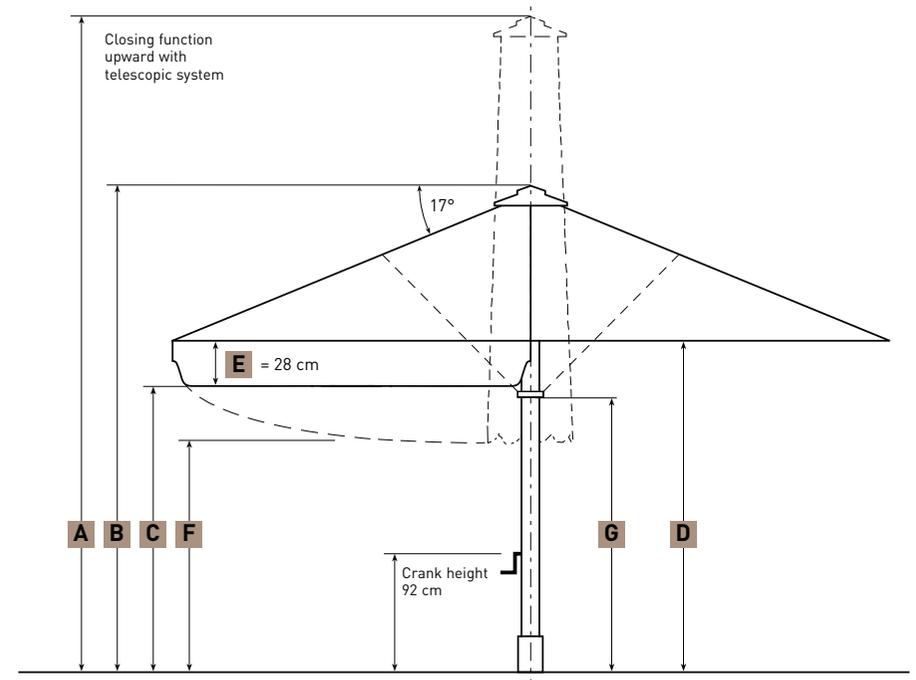

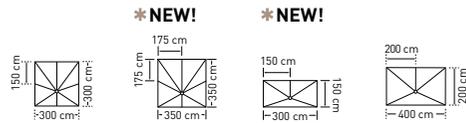


SCHATTELLO eccentric		3.0 x 3.0 m	3.5 x 3.5 m	1.5 x 3.0 m	2.0 x 4.0 m	
X	Distance from centre pole to outer edge of canopy	cm	100	100	50	70
	Segments		8	8	5	5
	Area	m ²	9	12.25	4.5	8
A	Height closed incl. top plate	cm	391	388	370	370
B	Height opened incl. top plate	cm	305	324	276	293
C	Headroom with valance	cm	212	212	212	212
D	Headroom without valance from spoke edge	cm	237	237	237	237
F	Ground clearance from spoke edge	cm	144	68	181	140
G	Height of lower disc flange	cm	250	247	231	246
J		cm	193	122	260	248
K		cm	232	178		
L		cm	213	169	207	169
M		cm	288	257		
	Weight without packaging MayTex-Acryl without valance	kg	37	37	21	27
	Support pole diameter	mm	outer-Ø 76, pole thickness 3			
	Packaging cardboard sleeve: length 444 cm		Ø 33 cm approx. 17 kg			
	Installation base length/width/min. depth	cm	50 / 50 / 60			
	Minimum-ballast Number of layers of concrete slabs XZ50 required		2 x = approx. 224 kg			

3.0 x 4.0 m	
X	100
	8
	12
A	410
B	300
C	212
D	237
F	118
G	263
J	197
K	192
L	175
M	293
	36
	outer-Ø 76, pole thickness 3
	Ø 33 cm approx. 17 kg
	50 / 50 / 60
	2 x = approx. 224 kg

The heights specified are for parasols with MayTex-Acryl covering fabric that are mounted in an anchor tube SZ150. The increase in height for eccentric parasols with other installation bases can be seen in the list below:

- Full frame pedestal: SZ203 + 17 cm
- Full frame pedestal: SZ412 + 12 cm
- Anchor plate: SZ131 + 1.5 cm
- Base plate: SZ273 + 4 cm
- Base plate: SZ275 + 4 cm


Dimensional tolerance approx. ± 5%

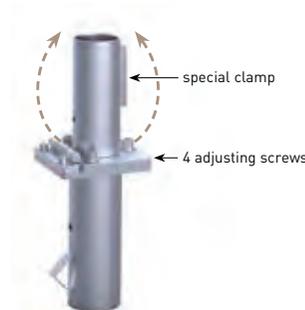


SZ150 with alignment possibility + special clamp


Alignment possibility + special clamp

It is only possible to use such installation bases for SCHATTELLO parasols that have a locking hinge or a full-frame pedestal, adjustable for slanting surfaces. Anchoring bases with locking hinge are installed with setscrews and a special surface clamp. This ensures that the eccentric parasol will be aligned and mounted completely upright.

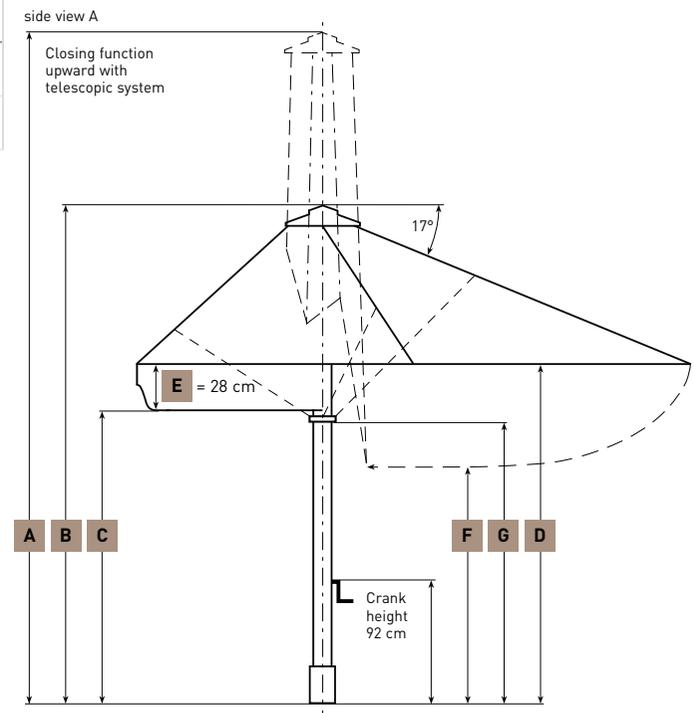


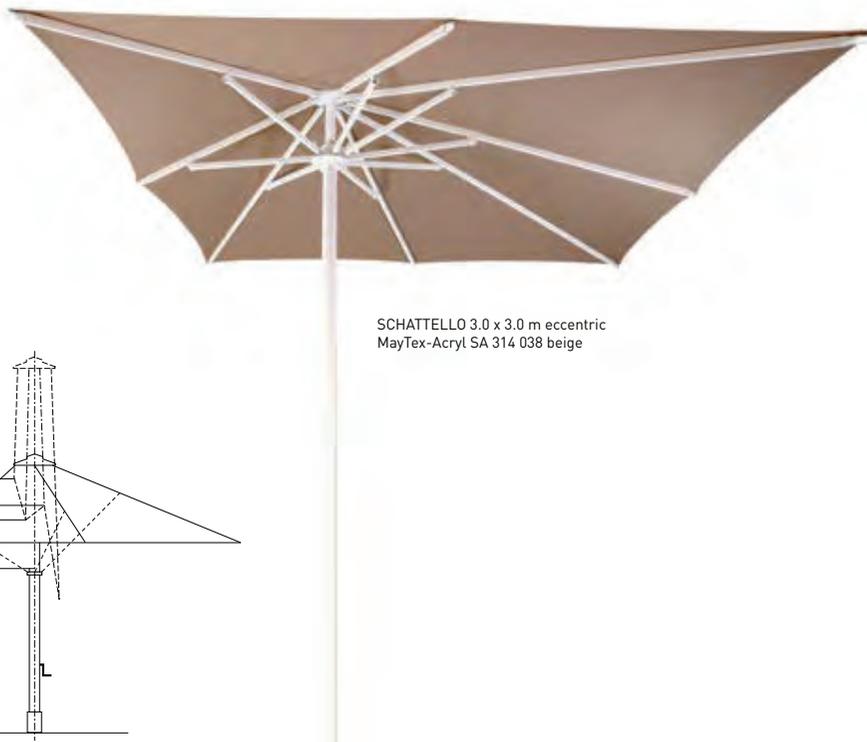

SCHATTELLO 3.0 x 3.0 m eccentric
MayTex-Acryl SA 314 038 beige

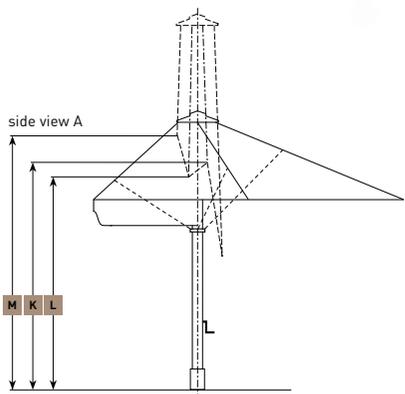


spoke allocation
top view:

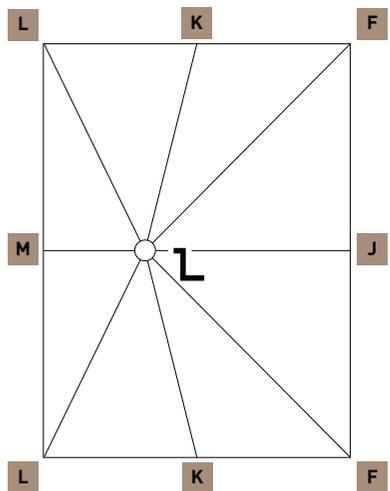


↑ side view A ↑

side view B

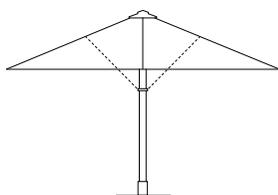

top view:

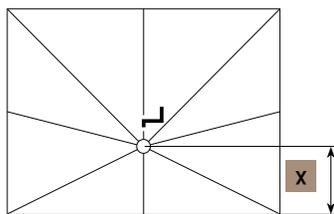

crank position
on narrow side

↑ side view B ↑



SCHATTELLO 3.0 x 3.0 m, eccentric
MayTex Acryl SA 314 030 light grey



canopy bonnet and base plate SZ273
 SCHATTELLO 4.5 x 4.5 m
 MayTex-Acryl DA 7560 light yellow



Canopy bonnet

A light bonnet in the centre of the canopy optically breaks the straight areas and lines. This gives the SCHATTELLO a complete new face. The overlapping between canopy bonnet and canopy ensures that as few as possible water enters the openings in case of rain and wind. So there are hardly any limitations of the regular functions. Available for all sizes (except parasols with continuous roof segments).



stainless steel V4A

Seawater-resistant stainless steel connections

To allow the use of the SCHATTELLO directly at the coast nearby salty sea water, rustproof materials must be used. With this package all turned and standard parts are supplied in stainless steel V4A (1.4401, AISI 316). Optimal protection for minimal oxidation of the aluminium frame.

art. no. **350118**



Protective sleeve, version bag

made of tarp material, colour grey. Please specify parasol size or serial number. Included in delivery of parasol.

art. no. **SA130**



Protective sleeve, version zipper

with zipper and rope, without telescopic pole, art. no. 355419; made of tarp material, colour grey. May also be used for parasols with heaters, if they are demounted (winter storage). Please specify parasol size or serial number.

art. no. **SA122**



Protective sleeve, version zipper for parasols with integrated heaters

with zipper and rope, without telescopic pole, art. no. 355419; made of tarp material, colour grey. For daily protection of your parasols with mounted heaters. Please specify parasol size or serial number.

art. no. **SA124**

***NEW!**

Telescopic pole

maximum length 4.5 m, without ring. For retrofit of all protective sleeves with zipper. No ladder required for pulling on the protective sleeve. One piece per protective sleeve needed.

art. no. **356040**





SCHATTELLO 4.0 x 4.5 m, MayTex-Acryl SA 314 003 yellow with rain gutter XA141, MayTex-Poly M 9526 bright yellow



SCHATTELLO 4.0 x 4.5 m, MayTex-Acryl SA 314 003 yellow with suspended rain gutter, MayTex-Poly M 9526 bright yellow



Rain gutter
in MayTex-Poly or MayTex-PVC, with aluminium rods for stabilization. Can only be used with valance.
art. no. **XA141**



Holder for suspended rain gutter
made from aluminium and stainless steel, 1 piece per spoke required.

with 1 eyelet screw and 1 stainless steel angle, left
art. no. **SA150**

with 1 eyelet screw and 1 stainless steel angle, right
art. no. **SA151**

with 2 eyelet screw and 2 stainless steel angles
art. no. **SA152**



Glass-fibre reinforced plastic holder for side sheet and rain gutter
1 piece per spoke required.
with 1 eyelet screw art. no. **SA141 01**
with 2 eyelet screws art. no. **SA141 02**

Length extension of centre pole
State required additional length in cm (max. 50 cm).

Shortening of centre pole
Length on request, dependent on parasol size.

Frame paint finish
Please state colour of powder-coating in RAL.

Canopy covering MayTex-PVC
approx. 480 g/m² ± 5%.

Side sheets
Textile in MayTex-Poly, see page 192 onwards.



Side sheets



PLAY- SCHOOL PARASOL



Example of a playschool parasol

Special model: Playschool parasol Ø 5 m

The colourful, multi-design canopy coverings consist of different, randomly selected segments. Thus each parasol is unique and offers fun and variety on any kids' playground. Only available in size Ø 5 m, MayTex-Acryl, with valance.

Frame finish:

RAL 9010 pure white

art. no. **SG5000 K001**

Frame finish:

RAL 9006 white aluminium

art. no. **SG5000 K002**

Impact protection for parasol mast

Make sure that the children's playing area is safe. Without safety precautions, carefree romping around may lead to tears. The soft material protects from painful bumps up to a height of 90 cm. If correctly mounted, our protective padding also covers the anchor tube. The vertical connection is fully fastened by hook-and-loop fastener. Therefore, the impact protection is optimally adapted to the parasol mast and so helps to minimize hard edges and corners that may lead to abrasions. Made from MayTex-PVC, available in all PVC colours of our cloth collection.

art. no. **350268**



SCHATTELLO 4.0 x 6.0 m
MayTex-Acryl SA 314 010 white

Lubricant LubriMay 13

for threaded spindle, content: 100 g.

art. no. **350652**



CleanoMay 13

This highly efficient cleaning concentrate removes grease, oil, coal, rust as well as other stubborn stains on your parasol canopy covering or frame. It can also serve to clean machines, kitchens (recognised as safe for foodstuffs by the Fresenius Institute), barbecue grills, tarpaulins and plastics. Moreover, CleanoMay 13 is non-toxic, biodegradable, non-flammable and non-corroding. 1 litre concentrate yields 26 litres liquid cleanser.

art. no. **350848**



Substitute canopy covering

An occasional change of canopy covering can give your patio a completely new flair.



TUBULAR MOTOR

You will find our product video at:
may.ag/e_en



Tubular motor

fully integrated in parasol mast, invisible; start-up via Plug and Play, open and close by pressing function key of radio transmitter for 3 seconds (for avoidance of unintentional switching), range of radio transmitter to parasol mast approx. 25 m; Control exclusively via radio. No wired control (fixed wiring) possible. The motors can only be used with anchor tubes SZ150, SZ131, SZ127, SZ186, SZ194, SZ210, SZ241 or SZ243. Compatible with LED-lighting, not compatible with heaters or loudspeakers; Power: 230 V~/50 Hz.

art. no. **202100**



Single-channel hand-held radio transmitter

single-channel device sufficient if only one parasol is to be controlled. Simultaneous control of one or any number of parasols possible (2 signals).

art. no. **202105**



202105 + 202115

Holder for radio transmitter

suitable for single-channel hand-held radio transmitter 202105. To be screwed to the wall.

art. no. **202115**



18-channel hand-held radio transmitter

for the control of several parasols; can be used to control solitary as well as grouped parasols, programming possible in our company after prior date arrangement. 18-channel device. For separate control of up to 18 parasols (36 signals).

art. no. **202106**

SCHATTELLO 5.0 x 5.0 m
MayTex-Acryl SA 314 010 white

Holder for radio transmitter

suitable for 18-channel hand-held radio transmitter 202106. To be screwed to the wall.

art. no. **202116**



202106 + 202116

Wall-mounted radio transmitter

radio transmitter for permanent screw-on installation. The transmitter must have direct visual contact with the radio receiver. Sufficient for the control of one parasol. Simultaneous control of one or any number of parasols possible (2 signals).

art. no. **202104**



Radio transmitting station

2-channel radio transmitter to open and close tubular motors by a home automation system (e.g. elero, elsner, GIRA, KNX, LOXONE, Rademacher or somfy). Direct visual contact to the radio transmitter required. Controls 1 or 2 parasols or 1 up to 2 groups of parasols. 4 signals; unidirectional and sequential. Simple integration by potential-free switching contacts (> 3 sec). Can be combined with an 18-channel radio transmitter for single or group control. Input 12 V - 24 V DC or 230 V~/ 50 Hz.

art. no. **202108**



Wind sensor

only to be used as a supportive measure. In case of rising wind, the operator of the business must see that the parasols are closed and secured with a strap. The wind sensor measures the speed of the wind and passes on a signal to the tubular motor, which then automatically closes the parasols. The wind threshold value can be programmed with an adjustable potentiometer. Solar-cell and radio transmission, no cabling needed. To be fastened in a suitable position with the two dowels supplied in the package. The location should be as exposed as possible and in the vicinity of the parasols. Direct visual contact with the radio receiver necessary.

art. no. **202110**





SCHATTELLO 4.5 x 4.5 m
MayTex-Acryl DA 8203 grey basalt

Below you will find a list of our range of all-in kits on offer.

Choose a parasol and one of the kits listed. From page 178 onwards you will find more information on the individual kit components. The kits can, however, only be applied in combination with installation option SZ127, SZ131, SZ150, SZ186, SZ194, SZ210, SZ241, SZ243, SZ273 or SZ275. We recommend 2 lights and 2 heaters for parasols with an area of up to 16 m². For larger-size parasols 4 lights and 4 heaters will be necessary. It is not possible to combine heaters and a motor.

Slim lights warm white



Kit S 2 art. no. 350940		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Slim light warm white 13 W	2	202090

Cannot be used for parasol size 2 x 3 m.

Kit S 4 art. no. 350941		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Slim light warm white 13 W	4	202090

Cannot be used for parasol size 2 x 3 m.

Kit S 6 art. no. 350942		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Slim light warm white 13 W	6	202090

Cannot be used for parasol size 2 x 3 m.

Kit S 2LED art. no. 350943		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	2	352187

Kit S 4LED art. no. 350944		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

Kit S 6LED art. no. 350988		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	6	352187

LED lighting RGB-ww (colours & warmwhite)

LED-bar RGB-ww (colours and warmwhite):
Information on colour control and dimming by smartphone or Bluetooth remote control sender art. no. 352890, see page 186.



Kit S 2RGB art. no. 352960		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	2	353925

Kit S 4RGB art. no. 352961		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

Kit S 6RGB art. no. 352962		
230 V connection. Kit consists of:		
	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Power supply within centre pole	1	354522
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	6	353925

LED lighting warm white

To dim the LED bar warm white by smart phone or radio transmitter order the Bluetooth remote dimmer art. no. 352888 and the Bluetooth remote control sender art. no. 352890 see page 186, if applicable.



Infrared heaters

In standard cases these kits are firmly connected with the underground cable. Alternatively, plug connector art. no. 200581 can be used.



Kit S 0 2A	art. no. 351490	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, long (only possible along diagonal spokes)		2	200579
Swivelling holder		2	202040
Infrared heater (RAL 9010 or 9006)		2	200430

For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 3.5 m, Ø 4 m, Ø 4.5 m, Ø 5 m, Ø 5.5 m, 2 x 2 m, 2.5 x 2.5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S0 2Z.
Cannot be used for parasol size 2 x 3 m.

Kit S 0 4A	art. no. 351491	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, long (only possible along diagonal spokes)		4	200579
Swivelling holder		4	202040
Infrared heater (RAL 9010 or 9006)		4	200430

For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 3.5 m, Ø 4 m, Ø 4.5 m, Ø 5 m, Ø 5.5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S0 4Z.

For parasol size 3 x 3 m eccentric opt for Kit S0 2A.

For sizes 2 x 2 m and 2.5 x 2.5 m opt for Kit S0 2Z.

Cannot be used for parasol size 2 x 3 m.

Kit S 0 2Z	art. no. 351492	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, short (please state position intended)		2	200585
Swift-fold spar		2	200578
Infrared heater (RAL 9010 or 9006)		2	200430

For parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric and 3 x 4 m eccentric please opt for Kit S0 2A.


Kit S 0 4Z	art. no. 351493	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, short (please state position intended)		4	200585
Swift-fold spar		4	200578
Infrared heater (RAL 9010 or 9006)		4	200430

This kit cannot be used for parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric, 3 x 4 m eccentric, 2 x 2 m, 2.5 x 2.5 m, 3 x 3 m and 4 x 5 m.

We will be pleased to give advice on alternatives.

Infrared heaters + slim lights warm white

In standard cases these kits are firmly connected with the underground cable. Alternatively, plug connector art. no. 200581 can be used.



Kit S 4 2A	art. no. 202062	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, long (only possible along diagonal spokes)		2	200579
Swivelling holder		2	202040
Infrared heater (RAL 9010 or 9006)		2	200430

Slim light warm white 13 W **4** **202090**
For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 4 m, Ø 5 m, 2 x 2 m, 2.5 x 2.5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S4 2Z.
Cannot be used for parasol size 2 x 3 m.

Kit S 4 4A	art. no. 202064	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, long (only possible along diagonal spokes)		4	200579
Swivelling holder		4	202040
Infrared heater (RAL 9010 or 9006)		4	200430

Slim light warm white 13 W **4** **202090**
For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 4 m, Ø 5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S4 4Z.

For parasol size 3 x 3 m eccentric opt for Kit S4 2A.

For sizes 2 x 2 m and 2.5 x 2.5 m please opt for Kit S4 2Z.

Cannot be used for parasol size 2 x 3 m.

Kit S 4 2Z	art. no. 207062	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, short (please state position intended)		2	200585
Swift-fold spar		2	200578
Infrared heater (RAL 9010 or 9006)		2	200430

Slim light warm white 13 W **4** **202090**
For parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric and 3 x 4 m eccentric please opt for Kit S4 2A.

Cannot be used for parasol size 2 x 3 m.

Kit S 4 4Z	art. no. 207064	quantity	art. no.
400 V connection. Kit consists of:			
Power supply within centre pole		1	354526
Electrical harness		1	200565
Automatic auxiliary cut out switch		1	202051
Cabling, short (please state position intended)		4	200585
Swift-fold spar		4	200578
Infrared heater (RAL 9010 or 9006)		4	200430

Slim light warm white 13 W **4** **202090**
This kit cannot be used for parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric, 3 x 4 m eccentric, 2 x 2 m, 2.5 x 2.5 m, 3 x 3 m and 4 x 5 m. We will be pleased to give advice on alternatives.

Cannot be used for parasol size 2 x 3 m.

Infrared heaters + LED lighting warm white

In standard cases these kits are firmly connected with the underground cable. Alternatively, plug connector art. no. 200581 can be used.

To dim the LED bar warm white by smart phone or radio transmitter, order the Bluetooth remote dimmer art. no. 352888 and the Bluetooth remote control sender art. no. 352890 see page 186, if applicable.



Kit S 4LED 2A art. no. 350953

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, long (only possible along diagonal spokes)	2	200579
Swivelling holder	2	202040
Infrared heater (RAL 9010 or 9006)	2	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 4 m, Ø 5 m, 2 x 2 m, 2.5 x 2.5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S 4LED 2Z.

Cannot be used for parasol size 2 x 3 m.

Kit S 4LED 4A art. no. 350954

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	202040
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 4 m, Ø 5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S4 LED 4Z.

For size 3 x 3 m eccentric opt for Kit S4 LED 2A.

For sizes 2 x 2 m and 2.5 x 2.5 m opt for Kit S4 LED 2Z.

Cannot be used for parasol size 2 x 3 m.

Kit S 4LED 2Z art. no. 350955

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, short (please state position intended)	2	200585
Swift-fold spar	2	200578
Infrared heater (RAL 9010 or 9006)	2	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

For parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric and 3 x 4 m eccentric please opt for Kit S 4LED 2A.

Infrared heaters + LED lighting RGB-ww (colours & warmwhite)

In standard cases these kits are firmly connected with the underground cable. Alternatively, plug connector art. no. 200581 can be used.

LED-bar RGB-ww (colours and warmwhite): Information on colour control and dimming by smartphone or Bluetooth remote control sender art. no. 352890, see page 186.



Kit S 4LED 4Z art. no. 350956

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
LED bar, warm white, without spot optics	4	352187

This kit cannot be used for parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric, 3 x 4 m eccentric, 2 x 2 m, 2.5 x 2.5 m, 3 x 3 m and 4 x 5 m.

We will be pleased to give advice on alternatives.

Kit S 4RGB 2A art. no. 352970

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	200369
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, long (only possible along diagonal spokes)	2	200579
Swivelling holder	2	202040
Infrared heater (RAL 9010 or 9006)	2	200408
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 4 m, Ø 5 m, 2 x 2 m, 2.5 x 2.5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S4 LED 2Z.

Cannot be used for parasol size 2 x 3 m.

Kit S 4RGB 4A art. no. 352971

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, long (only possible along diagonal spokes)	4	200579
Swivelling holder	4	202040
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

For parasol sizes 6 x 6 x 6 m with valance, Ø 3 m, Ø 4 m, Ø 5 m, 3.5 x 3.5 m, 2 x 4 m, 2.5 x 3.0 m, 2.5 x 3.5 m and 4 x 4 x 4 m please opt for Kit S4 RGB 4Z.

For size 3 x 3 m eccentric opt for Kit S4 RGB 2A.

For sizes 2 x 2 m and 2.5 x 2.5 m opt for Kit S4 RGB 2Z.

Cannot be used for parasol size 2 x 3 m.

Kit S 4RGB 2Z art. no. 352972

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, short (please state position intended)	2	200585
Swift-fold spar	2	200578
Infrared heater (RAL 9010 or 9006)	2	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

For parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric and 3 x 4 m eccentric please opt for Kit S 4RGB 2A.

Kit S 4RGB 4Z art. no. 352973

400 V connection. Kit consists of:	quantity	art. no.
Power supply within centre pole	1	354526
Electrical harness	1	200565
Automatic auxiliary cut out switch	1	202051
Cabling, short (please state position intended)	4	200585
Swift-fold spar	4	200578
Infrared heater (RAL 9010 or 9006)	4	200430
Power supply unit (PSU) for max. 6 LED bars, integrated in parasol	1	351920
Bluetooth remote dimmer v16-9	1	352888
LED-bar RGB-ww (colours and warmwhite)	4	353925

This kit cannot be used for parasol sizes 3 x 3 m eccentric, 2 x 4 m eccentric, 3 x 4 m eccentric, 2 x 2 m, 2.5 x 2.5 m, 3 x 3 m and 4 x 5 m. We will be pleased to give advice on alternatives.

Kit S 0 M art. no. 353014

230 V connection. Kit consists of	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
Tubular motor (radio controlled)	1	202100
Electrical harness	1	350933

Tubular motor + LED lighting warm white

Tubular motor: Please order radio transmitter separately, see page 92.

To dim the LED bar warm white by smart phone or radio transmitter, order the Bluetooth remote dimmer art. no. 352888 and the Bluetooth remote control sender art. no. 352890 see page 186, if applicable.



Kit S 2LED M art. no. 350946

12 V + 230 V connection. Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
H1-MAY plug connector	1	350931
Power supply within centre pole	1	354523
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, installed on the outdoor wall or inside the house	1	351920
LED bar, warm white, without spot optics	2	352187
Tubular motor (radio controlled)	1	202100

Kit S 4LED M art. no. 350947

12 V + 230 V connection. Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
H1-MAY plug connector	1	350931
Power supply within centre pole	1	354523
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, installed on the outdoor wall or inside the house	1	351920
LED bar, warm white, without spot optics	4	352187
Tubular motor (radio controlled)	1	202100

Kit S 6LED M art. no. 350948

12 V + 230 V connection. Kit consists of:	quantity	art. no.
W-MAY 3-pole plug connector	1	352422
H1-MAY plug connector	1	350931
Power supply within centre pole	1	354523
Electrical harness	1	350933
Power supply unit (PSU) for max. 6 LED bars, installed on the outdoor wall or inside the house	1	351920
LED bar, warm white, without spot optics	6	352187
Tubular motor (radio controlled)	1	202100

Tubular motor

Please order radio transmitter separately, see page 92.



Tubular motor + LED lighting RGB-ww (colours & warmwhite)

Tubular motor: Please order radio transmitter separately, see page 92.

LED-bar RGB-ww (colours and warmwhite): Information on colour control and dimming by smartphone or Bluetooth remote control sender art. no. 352890, see page 186.



Kit S 2RGB M art. no. 352963

12 V + 230 V connection. Kit consists of:		quantity	art. no.
W-MAY 3-pole plug connector		1	352422
H1-MAY plug connector		1	350931
Power supply within centre pole		1	354523
Electrical harness		1	350933
Power supply unit (PSU) for max. 6 LED bars, installed on the outdoor wall or inside the house		1	351920
Bluetooth remote dimmer v16-9		1	352888
LED-bar RGB-ww (colours and warmwhite)		2	353925
Tubular motor (radio controlled)		1	202100

Kit S 4RGB M art. no. 352964

12 V + 230 V connection. Kit consists of:		quantity	art. no.
W-MAY 3-pole plug connector		1	352422
H1-MAY plug connector		1	350931
Power supply within centre pole		1	354523
Electrical harness		1	350933
Power supply unit (PSU) for max. 6 LED bars, installed on the outdoor wall or inside the house		1	351920
Bluetooth remote dimmer v16-9		1	352888
LED-bar RGB-ww (colours and warmwhite)		4	353925
Tubular motor (radio controlled)		1	202100

Kit S 6RGB M art. no. 352965

12 V + 230 V connection. Kit consists of:		quantity	art. no.
W-MAY 3-pole plug connector		1	352422
H1-MAY plug connector		1	350931
Power supply within centre pole		1	354523
Electrical harness		1	350933
Power supply unit (PSU) for max. 6 LED bars, installed on the outdoor wall or inside the house		1	351920
Bluetooth remote dimmer v16-9		1	352888
LED-bar RGB-ww (colours and warmwhite)		6	353925
Tubular motor (radio controlled)		1	202100



SCHATTELLO Ø 5.0 m
MayTex-Acryl SA 314 763 bordeaux
alternating with SA 314 347 ruby

SCHATTELLO – mobile installation options

Full frame pedestals for 1 set of concrete slabs

Full frame pedestal

frame size 103 x 111 cm, total height 29 cm, height of frame x = 5 cm, for 6- and 8-segment parasols, galvanized, weight approx. 30 kg. For 1 set of standard concrete slabs 50 x 50 x 5 cm.

art. no. **SZ411**



Full frame pedestal with 4 rubber diagonal support levelling screws

frame size 103 x 111 cm, total height min. 32 cm, max. 36 cm, for 6- and 8-segment parasols, galvanized, weight approx. 30 kg. For 1 set of standard concrete slabs 50 x 50 x 5 cm.

art. no. **SZ412**



Full frame pedestal on wheels

with rubber heavy-duty rollers and fixing brakes, frame size 103 x 111 cm, total height 36 cm, diameter of rollers 5 cm, for 6- and 8-segment parasols, galvanized, weight approx. 31 kg. For 1 set of standard concrete slabs 50 x 50 x 5 cm. Attention: wind sensitive!

art. no. **SZ414**



Heavy-duty wheels Ø 15 cm

wheel diameter 15 cm, for uneven surfaces. Rubber, with fixing brakes, loading capacity 110 kg/wheel. suitable for SZ414 and SZ205.

For orders with full frame pedestal
For retrofitting

art. no. **351498**

art. no. **351499**

Full frame pedestal on feet

for forklift or lift truck transport, frame size 103 x 111 cm, foot height y = 10 cm, for 6- and 8-segment parasols, galvanized, weight approx. 30 kg. For 1 set of standard concrete slabs 50 x 50 x 5 cm.

art. no. **SZ420**



SCHATTELLO – mobile installation options

Frame pedestal cover plate

stainless steel 1.4310, fits for SZ411, SZ412, SZ414 and SZ420. For retrofitting.

art. no. **200906**



SZ412 with 200906

Full frame pedestals for 2 sets of concrete slabs

Full frame pedestal

frame size 103 x 103 cm, total height 34 cm, height of frame x = 5 cm, galvanized, weight approx. 28 kg. For 2 sets of standard concrete slabs 50 x 50 x 5 cm.

art. no. **SZ201**



Full frame pedestal

with rubber diagonal support levelling screws, frame size 103 x 103 cm, total height min. 37 cm, max. 41 cm, galvanized, weight approx. 29 kg. For 2 sets of standard concrete slabs 50 x 50 x 5 cm.

art. no. **SZ203**



Full frame pedestal on wheels

with rubber heavy-duty rollers and fixing brakes, frame size 103 x 103 cm, total height 41 cm, diameter of rollers 5 cm, galvanized, weight approx. 29 kg. For 2 sets of standard concrete slabs 50 x 50 x 5 cm. Attention: wind sensitive!

art. no. **SZ205**




SCHATTELLO – mobile installation options

Full frame pedestal

customized height to fit patio surface, frame size 103 x 103 cm, screw-off upper part, for 6- and 8-segment parasols, galvanized, weight approx. 29 kg, incl. top plate for winter protection. For 1 set of standard concrete slabs 50 x 50 x 5 cm, s = Ø 10 cm.


art. no. **SZ208**

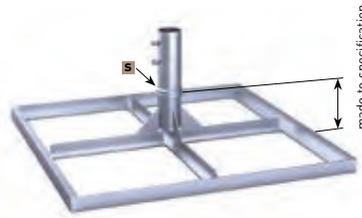

Full frame pedestal with placement hinge

customized height to fit patio surface, frame size 103 x 103 cm, screw-off upper part, galvanized, weight approx. 32 kg, incl. top plate for winter protection. For 1 set of standard concrete slabs 50 x 50 x 5 cm, v = bore for power cable through centre post Ø 7 cm, x = 16 cm, y = 17.5 cm.

art. no. **SZ210**

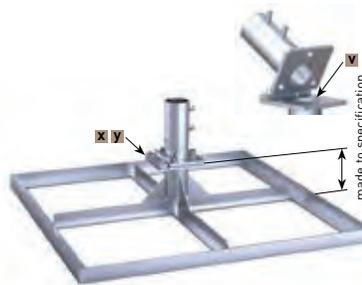

Concrete slabs

1 set = 4 slabs, each 50 x 50 x 5 cm, weight per slab: approx. 31 kg, total weight approx. 124 kg.

art. no. **XZ50**



SCHATTELLO – mobile installation options

Steel plates with cut off edge

1 set = 4 slabs, each 50 x 50 x 1.2 cm. Cut off edge 70 mm x 45°. Weight per slab: approx. 29 kg, total weight approx. 116 kg.

art. no. **XZ51**



Free-standing base plate

for parasols up to 21 m² in size, to be screwed together on site, heaviest component approx. 50 kg, base plate size 147 x 147 cm, steel plate thickness x = 12 mm, galvanized, weight approx. 213 kg.

art. no. **SZ272**



SZ272 / SZ274

Free-standing base plate

for parasols from 21 m² in size, to be screwed together on site, heaviest component approx. 63 kg, base plate size 147 x 147 cm, steel plate thickness x = 15 mm, galvanized, weight approx. 263 kg.

art. no. **SZ274**

Base plate with placement hinge

for parasols up to 21 m² in size, to be screwed together on site, heaviest component approx. 50 kg, base plate size 147 x 147 cm, v = bore for power cable through centre post Ø 7 cm, steel plate thickness x = 12 mm, galvanized, weight approx. 214 kg.

art. no. **SZ273**



SZ273 / SZ275

Base plate with placement hinge

for parasols from 21 m² in size, to be screwed together on site, heaviest component approx. 63 kg, base plate size 147 x 147 cm, steel plate thickness x = 15 mm, galvanized, weight approx. 264 kg.

art. no. **SZ275**

Anti-slip mat

1 set = 4 pieces 73 x 73 cm each, suitable for the steel plates of the installation options SZ272, SZ273, SZ274, SZ275, SZ240, SZ241, SZ242 and SZ243. Increases the coefficient of friction between steel plate and floor covering (wood, concrete slabs, asphalt), and therefore reduces the risk of slipping during windy weather. Colour black, x = 3 mm.

art. no. **352789**



SCHATTELLO – stationary installation options

Anchor tube to be embedded in concrete


2 pieces, screw-off upper part, for 6- and 8-segment parasols, galvanized, (also available in stainless steel 1.4301 and 1.4571), weight approx. 7 kg, incl. top plate for winter protection. a = 22 cm, b = 29 cm, s = Ø 10 cm, y = 16 cm.

art. no. **SZ118**

Anchor tube to be embedded in concrete

identical with SZ118, stainless steel (1.4571)

art. no. **352453**




SZ118 options: galvanized with additional powder-coating


Standard length




Extra length + 10 cm

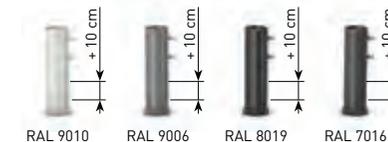


Extra length + 20 cm

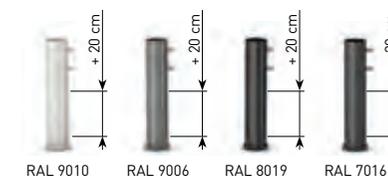

Extra length + 30 cm

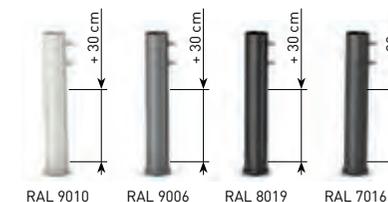


Extra length + 40 cm

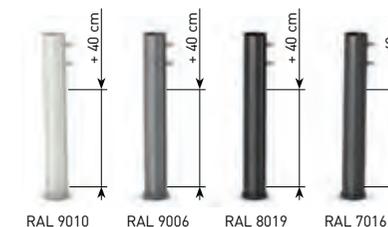


SZ118 options: galvanized

SZ118 upper anchor tube, extra length

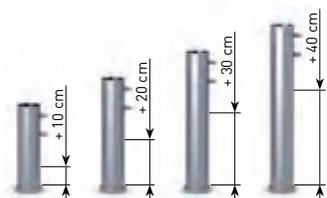

SZ118 lower anchor tube, extra length

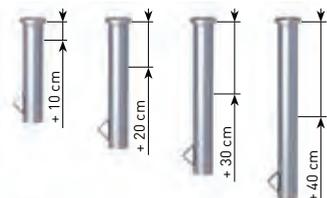

SCHATTELLO – stationary installation options

Anchor tube to be embedded in concrete with placement hinge

2 pieces, screw-off upper part, galvanized, weight approx. 11 kg, incl. top plate for winter protection.

v = bore for power cable through centre post \varnothing 7 cm.

w = bore hole for underground cable \varnothing 1.3 cm.

a = 23 cm, b = 28 cm, x = 16 cm, y = 17.5 cm, z = 15 cm.


art. no. **SZ150**

* NEW!

Anchor tube to be embedded in concrete with placement hinge


identical with SZ150, stainless steel (1.4571)

art. no. **356215**

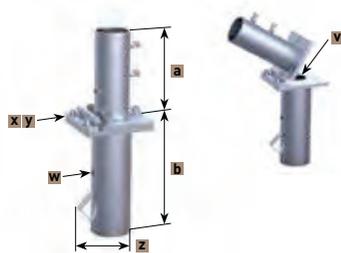

SZ150 options: galvanized


SZ150 upper anchor tube, extra length

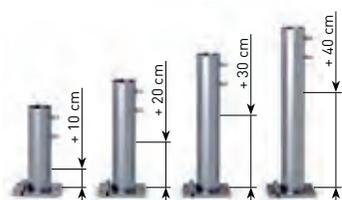

SZ150 lower anchor tube, extra length



SZ150 with tilt adjustment + surface clamping

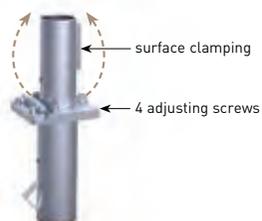

SZ150 options: galvanized with additional powder-coating

Standard length




Extra length + 10 cm



Extra length + 20 cm



Extra length + 30 cm

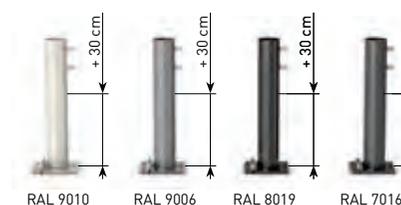

Extra length + 40 cm




SCHATTELLO – stationary installation options

Anchor tube to be embedded in concrete

for an existing foundation with a bore hole of min. \varnothing 71 mm, 2 pieces, screw-off upper part, for 6- and 8-segment parasols. Bore hole filled with grouting or epoxy resin to fix lower part of anchor tube. Existing foundation must be adequate in size for the designated parasol. Galvanized, weight approx. 5 kg, lower tube square, incl. top plate for winter protection, a = 22 cm, b = 29 cm, s = \varnothing 10 cm, y = \square 5 cm.


art. no. **SZ146**



Dowel-anchored plate

2 pieces, screw-off upper part, for 6- and 8-segment parasols, galvanized, weight approx. 14 kg, a = 22 cm, x = \square 30 cm, t = 1.5 cm, z = \varnothing 1.8 cm


art. no. **SZ261**

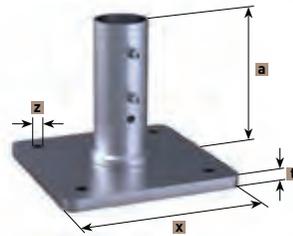

Dowel-anchored plate with placement hinge

galvanized, weight approx. 11.8 kg, v = bore for power cable through centre post \varnothing 7 cm, a = 23 cm, x = 26 cm, y = 27.5 cm, t = 1.2 cm, z = \varnothing 1.8 cm

art. no. **SZ131**

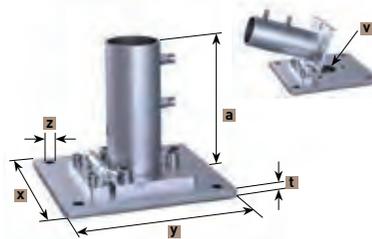

SCHATTELLO – stationary installation options

Dowel-anchored plate

customized height to fit patio surface, anchor plate 50 x 50 cm, screw-off upper part, for 6- and 8-segment parasols, galvanized, weight approx. 32 kg, incl. top plate for winter protection, s = \varnothing 10 cm.

art. no. **SZ129**



Dowel-anchored plate with placement hinge

customized height to fit patio surface, anchor plate 50 x 50 cm, screw-off upper part, galvanized, weight approx. 33 kg, incl. top plate for winter protection. v = bore for power cable through centre post \varnothing 7 cm, x = 16 cm, y = 17.5 cm.

art. no. **SZ127**





SCHATTELLO – stationary installation options

Flat-roof dowel-anchored plate with placement hinge

externally insulated roof system, system-conform flat roof connection with liquid plastic, customized height to fit flat roof surface, dowel plate 50 x 50 cm, screw-off upper part, galvanized, weight approx. 38 kg, incl. top plate for winter protection.

v = bore for power cable through centre post \varnothing 7 cm,
x = 16 cm, y = 17.5 cm.

art. no. **SZ186**

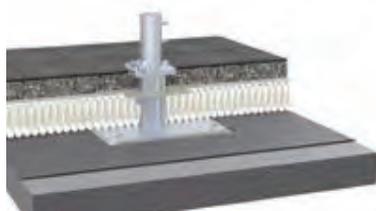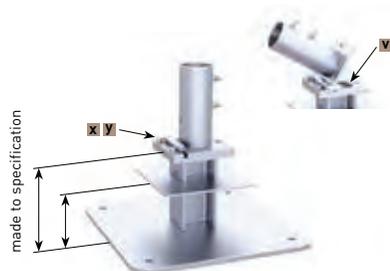


Flat-roof dowel-anchored plate with upper anchor tube

externally insulated roof system, loose-and-fixed flange assembly, bitumen waterproofing system and synthetic waterproofing material. Total height is determined by order to achieve the same level as the flat roof ground, dowelled plate 50 x 50 cm. Upper part removable, galvanized, weight approx. 37 kg, including top plate for winter protection.

v = bore for power cable through centre post \varnothing 7 cm,
x = 16 cm, y = 17.5 cm.

art. no. **SZ194**

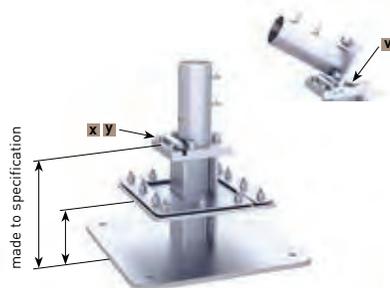

SCHATTELLO – stationary installation options

Wall bracket

galvanized, weight approx. 5.5 kg, ground plate 30 x 20 cm, x = 7 cm, t = 1 cm. Bottom end of centre pole is supported by the bottom of the tube. The height is changed by the measure y = 5 cm. This option only makes sense in case of low balustrades and ledges, otherwise the parasol will hit the wall.

art. no. **RZ125**



Wall pressure plate

fits for RZ125, galvanized; 30 x 20 cm; to be clamped onto the existing bars (only possible if these are very strong), bore holes for M16 stud bolts (not included in the delivery).

art. no. **352579**



**RZ125 in combination
with 352579**

Anchor bolt

bolt and nut, fits for SZ261, SZ131, SZ127, SZ129, SZ186 and SZ194; approved for cracked and non-cracked concrete B25 to B55 (old compressive strength classes) C20/25 to C50/60, (new EU classification), also suitable for concrete B15 and natural stone with dense structure. Concrete bore hole \varnothing 16 x 115 mm. in stainless steel A4. Package contains 4 bolts. European Technical Approval ETA-05/0069.

art. no. **200900**



SCHATTELLO – stationary installation options

Ground screw anchor fixture

Upper anchor tube, suitable for ground screw KSF F 140 x 2100-M, Screw-in ground anchor not included in delivery, standard parts for screwing included, for 6- and 8-segment parasols, Hot-dip galvanized, weight approx. 6 kg, a = 26 mm, x = 22 cm, t = 1.5 cm, see page 210 for further information.

art. no. **DMZ329**



Screw-in ground anchor

groundscrew with upper anchor tube, incl. standard parts, parts unscrewed on delivery, steel, for 6- and 8-segment parasols, galvanized acc. DIN EN ISO 1461, weight approx. 30 kg, delivered in two ready-to-assemble parts. See page 210 for further information.

art. no. **DMZ330**



Ground screw anchor fixture with placement hinge

Upper anchor tube, suitable for ground screw KSF F 140 x 2100-M, Screw-in ground anchor not included in delivery, standard parts for screwing included, hot-dip galvanized, weight approx. 22 kg, v = bore for power cable through centre post Ø 7 cm, x = 32 cm, y = 29 cm, see page 210 for further information.


art. no. **SZ349**



Ground screw anchor fixture with placement hinge

suitable for all sizes up to 28 m²; groundscrew with upper anchor tube, incl. standard parts, parts unscrewed on delivery, steel, galvanized acc. DIN EN ISO 1461, weight approx. 46 kg, incl. top plate for winter protection. delivered in two ready-to-assemble parts. v = bore for power cable through centre post Ø 7 cm. For further information see page 210 onwards.

art. no. **SZ350**

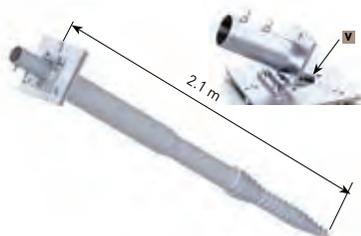


SCHATTELLO – stationary installation options

Base plate

customized height to fit patio surface, for parasols up to 21 m² in size, to be screwed together on site, heaviest component approx. 50 kg, base plate size 147 x 147 cm, steel plate thickness x = 12 mm, screw-off upper part, for 6- and 8-segment parasols, galvanized, weight approx. 224 kg, incl. top plate for winter protection, y = □ 28 cm.

art. no. **SZ240**

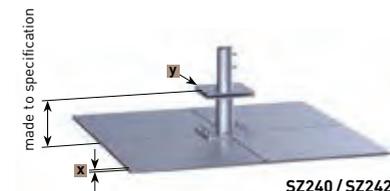

Base plate

customized height to fit patio surface, for parasols from 21 m² in size, to be screwed together on site, heaviest component approx. 63 kg, base plate size 147 x 147 cm, steel plate thickness x = 15 mm, screw-off upper part, for 6- and 8-segment parasols, galvanized, weight approx. 274 kg, incl. top plate for winter protection, y = □ 28 cm.


art. no. **SZ242**



Base plate with placement hinge

customized height to fit patio surface, for parasols up to 21 m² in size, to be screwed together on site, heaviest component approx. 50 kg, base plate size 147 x 147 cm, steel plate thickness x = 12 mm, screw-off upper part, galvanized, weight approx. 225 kg, incl. top plate for winter protection. v = bore for power cable through centre post Ø 7 cm, y = □ 28 cm.

art. no. **SZ241**

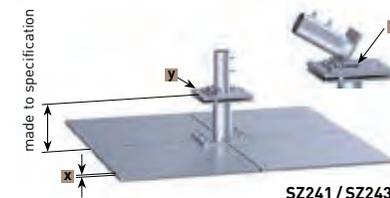

Base plate with placement hinge

customized height to fit patio surface, for parasols up to from 21 m² in size, to be screwed together on site, heaviest component approx. 63 kg, base plate size 147 x 147 cm, steel plate thickness x = 15 mm, screw-off upper part, galvanized, weight approx. 275 kg, incl. top plate for winter protection, y = □ 28 cm.

art. no. **SZ243**



Theft pin

padlock and pin, in stainless steel, for support pole Ø 76 mm. suitable for retrofitting.

art. no. **200103**

